

**axicon**

THE BARCODE EXPERTS

***axicode***

## Features

95mm x 70mm  
field of view

Three different  
operating positions

ISO/IEC compliant  
verification

USB powered

Data content checker

# Axicon 15500

## Linear and 2D barcode verifier

The Axicon 15500 barcode verifier is designed to read both linear and two-dimensional matrix barcodes simultaneously. All the symbols seen in its field of view are verified individually, and the user simply selects each barcode in turn to see the specific results.

The field of view - 95 mm by 70 mm - is the world's largest for a handheld 2D barcode verifier. Linear and 2D barcodes are verified in accordance with the appropriate ISO/IEC standard, with linear barcodes being sampled ten times from top to bottom.

Data Matrix, GS1 DataMatrix, QR Code, GS1 QR Code, EAN, UPC, ITF-14, GS1 Databar and GS1-128 symbols can all be verified. The verifier is designed to be used in three different positions so that even barcodes on awkwardly shaped objects can be easily read. It is powered solely via its USB connection to a PC or laptop, and the software runs on any Microsoft supported version of Windows, from Windows 7 onwards.

The record of each verification includes the image of all the codes in the field of view, as well as the reports for each barcode. These verification files can be consecutively numbered or date and time stamped if required for traceability auditing processes. The verifier may be configured to comply with the FDA regulation 21 CFR Part 11.

### About Axicon

Axicon Auto ID is a world leader in barcode verification, having developed and manufactured our own range of verifiers since 1989. Axicon barcode verifiers are used to measure the quality of linear and matrix barcodes, on all levels of product packaging.



**Industry**  
Partner

Church Road, Weston on the Green, Oxfordshire, OX25 3QP, UK  
Tel: +44 (0)1869 351155 | Email: [sales@axicon.com](mailto:sales@axicon.com)  
Web: [www.axicon.com](http://www.axicon.com)



## Software Specifications



|                                          |                                                                                                                                                                                               |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Symbologies verified                     | EAN-8, EAN-13, UPC-A, UPC-E, ITF-14, GS1-128, GS1 DataMatrix, GS1 QR Code, Data Matrix, GS1 Databar, QR Code, Code 39, Code 93, Code 128, Codabar, ITF, MSI Plessey.                          |
| Analysis performed on linear symbologies | Full ISO/IEC 15416 parameter analysis, average bar gain, check digit validation, data length, nominal bar width (x-dimension), symbol structure, quiet zone validation, wide to narrow ratio. |
| Analysis performed on 2D symbologies     | Full ISO/IEC 15415 parameter analysis (parameters vary according to the symbology). Nominal bar width (x-dimension), average module gain.                                                     |
| Data analysis                            | Data content checker for Application Identifiers with GS1-128, GS1 DataBar, GS1 DataMatrix and GS1 QR Codes.                                                                                  |
| Logging                                  | Scan saving and loading - stores complete details of scan file data. Allows for remote diagnostics and also for increased traceability. Autosaving of scans for audit trail purposes.         |
| Multi-language                           | English, French, Spanish, Danish, Dutch, German, Slovenian. Other languages on request                                                                                                        |

## Hardware Specifications

|                            |                                                                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions                 | 205 x 195 x 141 mm (8"x 7.6" x 5.5") - Maximum image size 95mm x 70mm (3.75" x 2.75")                                                                                                                                           |
| Weight                     | 1.5 Kg (53 oz)                                                                                                                                                                                                                  |
| Construction               | Plastic housing, CMOS sensor, LED illumination                                                                                                                                                                                  |
| Power consumption          | Current draw 360mA - supplied from USB host.                                                                                                                                                                                    |
| Aperture reference numbers | 05, 06, 08, 10, 16 and 20. The software automatically identifies the symbology and its nominal bar width (x-dimension) and adjusts the aperture size to comply with the symbology specifications and relevant ISO/IEC standard. |
| Wavelength of light        | 660 nm                                                                                                                                                                                                                          |

## General Information

|                      |                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Report generation    | A report can be produced via the in-built report generator, and saved or printed. The report generator can create reports in .pdf, .html, .txt, .csv or other formats (Append facilities are available for any format which supports this). The report generator is customisable via scripts and templates so reports can be tailored to individual requirements. |
| System requirements  | PC running any currently supported version of Windows - USB 2.0                                                                                                                                                                                                                                                                                                   |
| Environmental        | Operating temperature: 10° to 40°C - Storage temperature: -20° to 70°C<br>Relative humidity: 25% to 80% @ 40°C non-condensing                                                                                                                                                                                                                                     |
| Regulatory approvals | CE certified, RoHS compliant. Meets ISO/IEC 15415, ISO/IEC15416, ISO/IEC 15426-1 and ISO/IEC 15426-2 standards. Has all the features necessary to meet the requirements of 21 CFR part 11.                                                                                                                                                                        |
| Warranty             | Two years parts and labour - return to bench.                                                                                                                                                                                                                                                                                                                     |

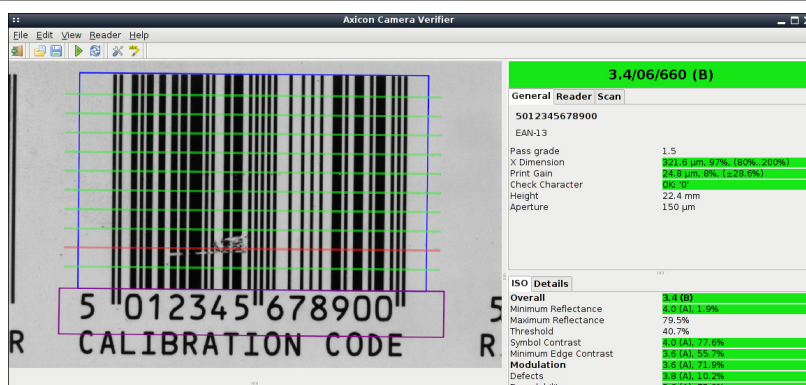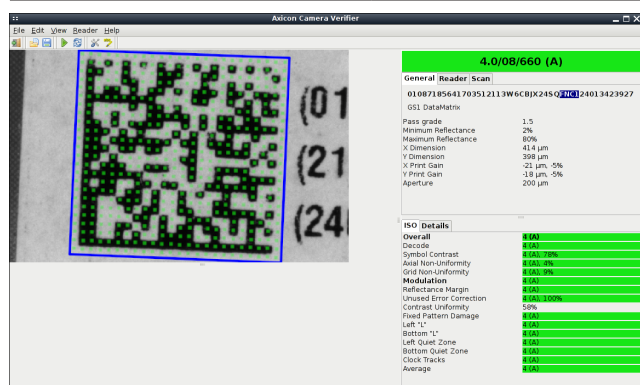

All trademarks are acknowledged as belonging to their respective companies. As Axicon continually improves its products, the specifications and features explained in this document are subject to change without notice.

